

JBQI

"JBQI": EQUALISED JUNCTION BOX WITH 4/6 INPUTS, IN IP65 STAINLESS STEEL




Stainless steel junction box with IP65 protection from water and dust, and fitted with electronic board for junction and equalisation of 4 or 6 load cells. Terminal board with screw for easing the connection of the load cells and the signal adjustment trimmer, for an accurate and reliable equalisation.

TECHNICAL FEATURES


- Stainless steel case.
- Protection degree: IP65.
- Maximum input voltage: 24Vdc.
- Maximum input current: 700mA.
- Maximum input load cell signal: 1000mV.
- Temperature effect: 50ppm/°C.
- Protection diodes against surcharges or electrostatic discharges.
- 4 cell inputs on screw connector or on soldering squares (for JB4Q1 model).
- 6 cell inputs on screw connector or on soldering squares (for JB6QI model).
- Dimensions: 155x158x45mm (lxwxh) for JB4QI
- Dimensions: 190x132x50mm (lxwxh) for JB6QI

DETAIL 1

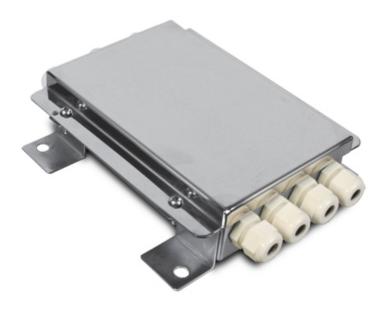

JB6Q1: Junction and equalisation box, in IP65 stainless steel.



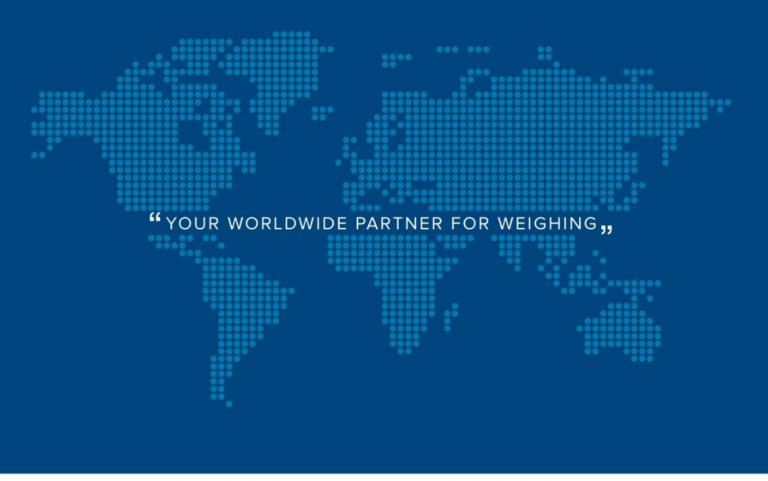

DINI ARGEO FRANCE sarl Nogent-sur-Marne DINI ARGEO GMBH Sinsheim - Germany

UK Ltd Taunton - United Kingdom

DINI ARGEO

DINI ARGEO WEIGHING INSTRUMENTS Ltd Shanghai - China DINI ARGEO WEIGHBRIDGES Calto (RO) – Italy



HEAD OFFICE Via Della Fisica, 20 41042 Spezzano di Fiorano Modena - Italy







UAB DESKA

PRAMONES 5 - LT:94102 - KLAIPEDA - LITHUANIA

Tel. 00370-46-381089 Fax. 00370-445-76466

info@deska.lt

SALES AND TECHNICAL ASSISTANCE SERVICE